

- 1) solepads to be centred and level min of 750mm.
- 2) all boarded lifts to be fitted with kwik guards and internal hand rails this includes **the bottom lift** (porches and garages).
- 3) all hoppups to be fitted with tie bars.
- 4) all corners to be returned with the use of return transoms **bridged / lapped boards is unacceptable** if in doubt contact your site supervisor.
- 5) facade brace to be fitted min every 4th bay.
- 6) all corners to be secured with tube and fitting (double coupler).
- 7) table lifts to be erected in full at first visit.
- 8) ladder access to be located as per site traffic management plan
1 x ladder access per plot.
- 9) barra runs to be erected at first visit for the brackie.
- 10) loading bay transom to be secured at all 4 points of standard **no exceptions** to be made including the bottom lift. If this is not possible due to ground level the transoms should be left out and ledgers fitted. alternate method of loading should be agreed by site supervisor.
- 11) loading bay gates to be fitted to all boarded lifts.
- 12) 4 x tie back tubes to be fitted to loading bay with double coupler.
- 13) 4 x facade brace to be fitted to the loading bay 2 each side.
- 14) **splicing pins** to be fitted at the joint of the standard both sides on (taylor wimpey sites).
- 15) correct signage to be used at all times.
- 16) all excess materials to be stacked neatly for removal no surplus scaffold to be left on scaffolding.


ALL PPE TO BE WORN AT ALL TIMES
HARD HAT, HIGH VIS VEST, SAFETY
BOOTS AND FALL ARREST
EQUIPMENT.
SAFETY HARNESS TO BE USED IN
CONJUNCTION WITH SG4
REGULATIONS.



Access to roof L H Gable



Access to roof L H Rear

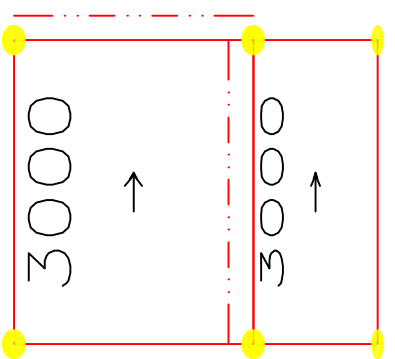


Plan




Ladder Access


Ladder Access Detail

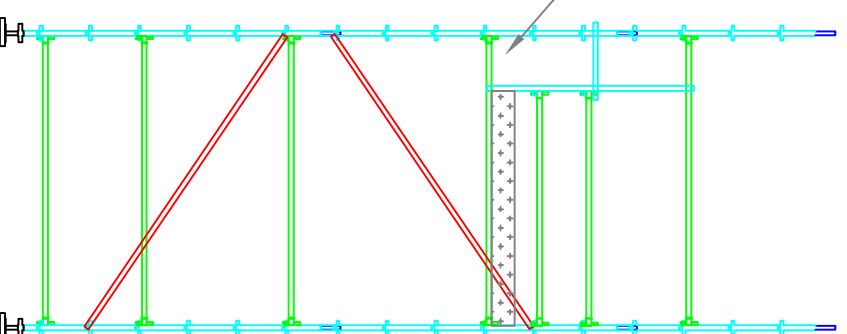

Elevation

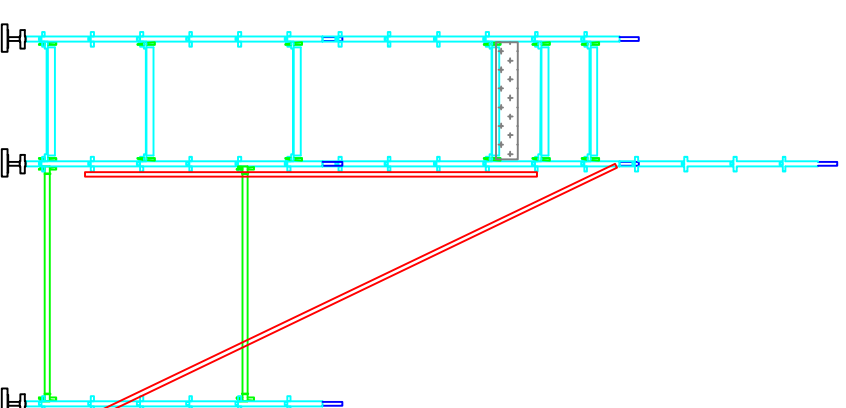

End Elevation



S&A
Skilling & Associates Limited

Bruckwork, Roofing, Roughcasting
Scaffolding Services

71 Nureaton Street Dalmainock,
Glasgow G40 3JT
Office: 0141 550 7250
Fax: 0141 550 7265

Loading on the main working platform must not exceed 2.0kN/m² and 1.0kN/m² on a further working platform. Hop up's taken at 0.75kN/m² on two working levels only.
All other remaining boarded lifts are considered as non working platforms and therefore should not be loaded.

Loading bays to be erected on the driveway of the plot where possible
Exact locations of loading bays and ladder access may change due to site specific conditions

All Kwikstage to be erected as per the Kwikstage manual
All components must be fully inspected before use and must comply with BS 1139 or equivalent

All doorways to be left clear where possible and all excess scaffold removed

Ground conditions should be level and firm to except the weight of the scaffold and the loads imposed upon it.

No direct loading with forklift on the main working platform only the landing tower to be used.

Working Drawing

Development Fair Meadows
Rosewell
No 45 Lindsey Circus

Proposed Kwikstage Access Scaffold

Scale Do Not Scale

Drawn By DN

Date 23.09.08

Checked By PB